

Datasheet - SRB301LC 24VAC/DC



Guard door monitors and Safety control modules for Emergency Stop applications / General Purpose safety controllers (Series PROTECT SRB) / SRB301LC

Preferred typ



- 1 Signalling output
- 3 safety contacts, STOP 0
- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	SRB301LC 24VAC/DC
Article number	101163475
EAN code	4250116201532
Replaced article number	101165472
eCI@ss	27-37-19-01

Approval

Approval



Classification


Standards	EN ISO 13849-1, IEC 61508, EN 60947-5-1
PL	up e (STOP 0)
Control category	up 4 (STOP 0)
DC	99% (STOP 0)
CCF	> 65 points
PFH value	≤ 2, 0 x 10 ⁻⁸ /h (STOP 0)

SIL	up 3 (STOP 0)
Mission time	20 Years
- notice	The PFH value is applicable for the combinations listed in the table for contact load (K) (current through enabling paths) and switching cycle number (n-op/y). In case of 365 operating days per year and a 24-hour operation, this results in the specified switching cycle times (t-cycle) for the relay contacts.

Diverging applications on request.

K	n-op/y	t-cycle
20 %	525.600	1,0 min
40 %	210.240	2,5 min
60 %	75.087	7,0 min
80 %	30.918	17,0 min
100 %	12.223	43,0 min

Global Properties

Product name	SRB301LC
Standards	IEC/EN 60204-1, EN 60947-5-1, EN ISO 13849-1, IEC 61508
Compliance with the Directives (Y/N) 	Yes
Climatic stress	EN 60068-2-78
Mounting	snaps onto standard DIN rail to EN 60715
Terminal designations	IEC/EN 60947-1
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, ventilated
- Material of the contacts	, self-cleaning, positive action
Weight	230 g
Start conditions	Automatic or Start button
Start input (Y/N)	Yes
Feedback circuit (Y/N)	Yes
Start-up test (Y/N)	No
Automatic reset function (Y/N)	Yes
Reset with edge detection (Y/N)	No
Pull-in delay	
- ON delay with automatic start	30 ms
Drop-out delay	
- Drop-out delay in case of emergency stop	≤ 50 ms

Mechanical data

Connection type	Screw connection
Cable section	
- Min. Cable section	0,25 mm ²
- Max. Cable section	2.5 mm ²
Pre-wired cable	rigid or flexible
Tightening torque for the terminals	0,6 Nm
Detachable terminals (Y/N)	No
Mechanical life	10.000.000 operations
Electrical lifetime	Derating curve available on request
resistance to shock	30 g / 11 ms
Resistance to vibration To EN 60068-2-6	10...55 Hz, Amplitude 0,35 mm, ± 15 %

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25 °C
- Max. environmental temperature	+45 °C

Storage and transport temperature	
- Min. Storage and transport temperature	-40 °C
- Max. Storage and transport temperature	+85 °C
Protection class	
- Protection class-Enclosure	IP40
- Protection class-Terminals	IP20
- Protection class-Clearance	IP54
Air clearances and creepage distances To IEC/EN 60664-1	
- Rated impulse withstand voltage U_{imp}	4 kV
Overvoltage category	II To VDE 0110
- Degree of pollution	2 To VDE 0110

Electromagnetic compatibility (EMC)

EMC rating	conforming to EMC Directive
------------	-----------------------------

Electrical data

Rated DC voltage for controls	
- Min. rated DC voltage for controls	20.4 V
- Max. rated DC voltage for controls	28.8 V
Rated AC voltage for controls, 50 Hz	
- Min. rated AC voltage for controls, 50 Hz	20.4 V
- Max. rated AC voltage for controls, 50 Hz	26.4 V
Rated AC voltage for controls, 60 Hz	
- Min. rated AC voltage for controls, 60 Hz	20.4 V
- Max. rated AC voltage for controls, 60 Hz	26.4 V
Contact resistance	max. 100 mΩ
Power consumption	max. 1.7 W; 1.9 VA
Type of actuation	AC/DC
Rated operating voltage U_e	24 VDC -15% / +20%, residual ripple max. 10% 24 VAC -15% / +10%
Operating current I_e	0,08 A
Frequency range	50 / 60 Hz
Electronic protection (Y/N)	No
Fuse rating for the operating voltage	0,5 A gG D-fuse

Inputs

Monitored inputs

- Short-circuit recognition (Y/N)	Yes
- Wire breakage detection (Y/N)	Yes
- Earth connection detection (Y/N)	Yes
Number of shutters	0 piece
Number of openers	2 piece
Cable length	1500 m with 1.5 mm ² ; 2500 m with 2.5 mm ²
Conduction resistance	max. 40 Ω

Outputs

Stop category	0
Number of safety contacts	3 piece
Number of auxiliary contacts	1 piece

Number of signalling outputs	0 piece
Switching capacity	
- Switching capacity of the safety contacts	max. 250 VAC, 6 A ohmic (inductive in case of appropriate protective wiring) min. 10 V, 10 mA
- Switching capacity of the auxiliary contacts	24 VDC, 2 A
Fuse rating	
- Protection of the safety contacts	6 A slow blow
- Fuse rating for the auxiliary contacts	2 A slow blow
Utilisation category To EN 60947-5-1	AC-15: 230 V / 6 A DC-13: 24 V / 6 A
Number of undelayed semi-conductor outputs with signaling function	0 piece
Number of undelayed outputs with signaling function (with contact)	1 piece
Number of delayed semi-conductor outputs with signaling function.	0 piece
Number of delayed outputs with signalling function (with contact).	0 piece
Number of secure undelayed semi-conductor outputs with signaling function	0 piece
Number of secure, undelayed outputs with signaling function, with contact.	3 piece
Number of secure, delayed semi-conductor outputs with signaling function	0 piece
Number of secure, delayed outputs with signaling function (with contact).	0 piece

LED switching conditions display

LED switching conditions display (Y/N)	Yes
Number of LED's	4 piece
LED switching conditions display	
- The integrated LEDs indicate the following operating states.	
- Position relay K1	
- Position relay K2	
- Supply voltage	
- Internal operating voltage U_i	

Miscellaneous data

Applications	 Emergency-Stop button  Guard system  Pull-wire emergency stop switches
--------------	--

Dimensions

Dimensions	
- Width	22.5 mm
- Height	100 mm
- Depth	121 mm

notice

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

notice - Wiring example

Input level: The example shows a 2-channel control of a guard door monitoring with two position switches, whereof one with positive break, external reset button (R); cross-wire monitoring and feedback circuit (H2)

The control recognises cross-short, cable break and earth leakages in the monitoring circuit.

Relay outputs: Suitable for 2 channel control, for increase in capacity or number of contacts by means of contactors or relays with positive-guided contacts.

In case of a 1-channel control, connect the NC contact to the operating voltage and bridge S11/S12 and S21/S22.

Automatic start: The automatic start is programmed by connecting the feedback circuit to the terminals X1/X2. If the feedback circuit is not required, establish a bridge

The wiring diagram is shown with guard doors closed and in de-energised condition.

Documents

Operating instructions and Declaration of conformity (it) 303 kB, 03.01.2014

Code: mrl_srb_301lc_it

Operating instructions and Declaration of conformity (es) 308 kB, 14.01.2014

Code: mrl_srb_301lc_es

Operating instructions and Declaration of conformity (jp) 408 kB, 03.01.2014

Code: mrl_srb_301lc_jp

Operating instructions and Declaration of conformity (nl) 307 kB, 14.01.2014

Code: mrl_srb_301lc_nl

Operating instructions and Declaration of conformity (en) 910 kB, 21.01.2010

Code: mrl_srb_301lc_en

Operating instructions and Declaration of conformity (fr) 309 kB, 14.01.2014

Code: mrl_srb_301lc_fr

Operating instructions and Declaration of conformity (pl) 340 kB, 20.03.2014

Code: mrl_srb_301lc_pl

Operating instructions and Declaration of conformity (pt) 393 kB, 22.08.2013

Code: mrl_srb_301lc_pt

Operating instructions and Declaration of conformity (de) 1 MB, 30.06.2010

Code: mrl_srb_301lc_de

Operating instructions and Declaration of conformity (da) 316 kB, 22.10.2015

Code: mrl_srb_301lc_da

Wiring example (99) 19 kB, 04.08.2008

Code: Ksrb3104

Wiring example (99) 19 kB, 04.08.2008

Code: Ksrb3104

Wiring example (99) 20 kB, 22.08.2008

Code: ksr3111

Wiring example (99) 18 kB, 22.08.2008

Code: ksr3119

BG-test certificate (de) 40 kB, 28.02.2005

Code: z_l30p01

CCC certification (cn) 96 kB, 24.09.2015

Code: q_srbp02


CCC certification (en) 122 kB, 24.09.2015

Code: q_srbp01


EAC certification (ru) 833 kB, 05.10.2015

Code: q_6042p17_ru


Images

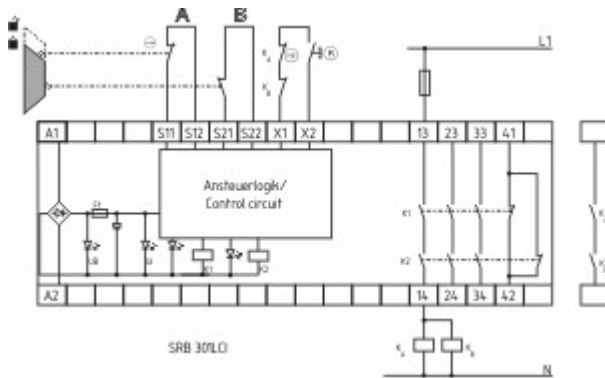


Wiring example

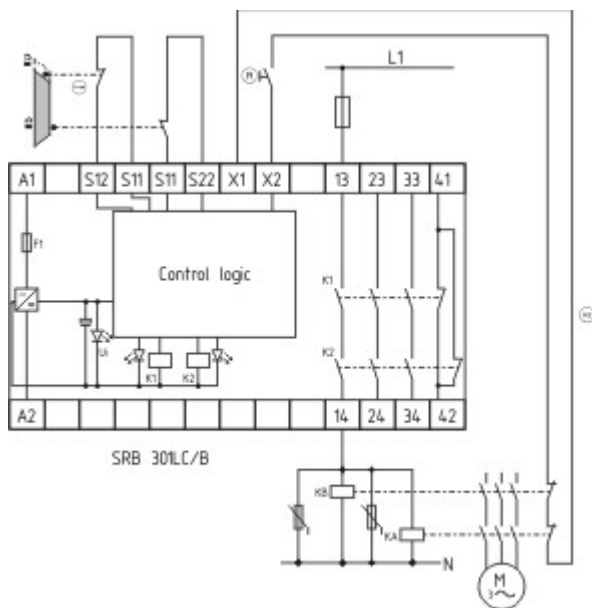

Wiring example

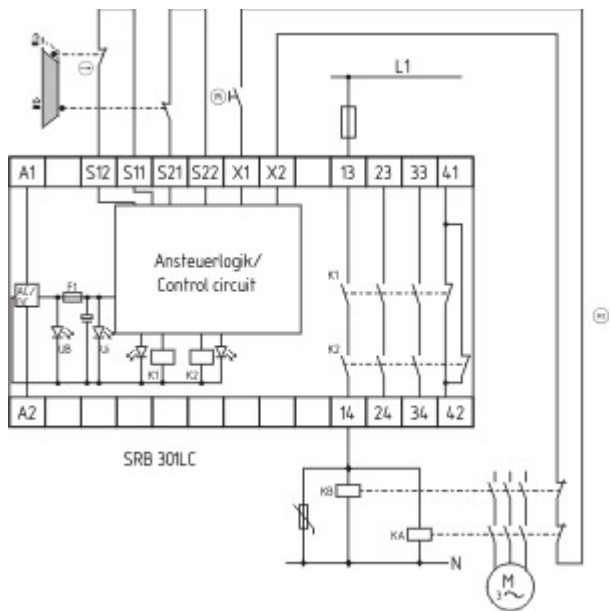

Wiring example

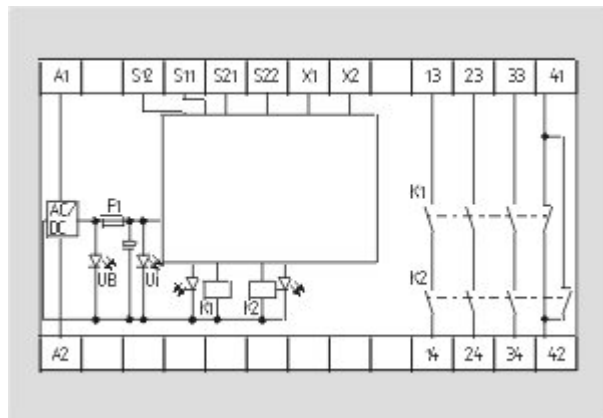

Internal wiring diagram

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 25.02.2016 - 18:05:24h Kasbase 3.2.1.F.64l